


# TOP VIEW

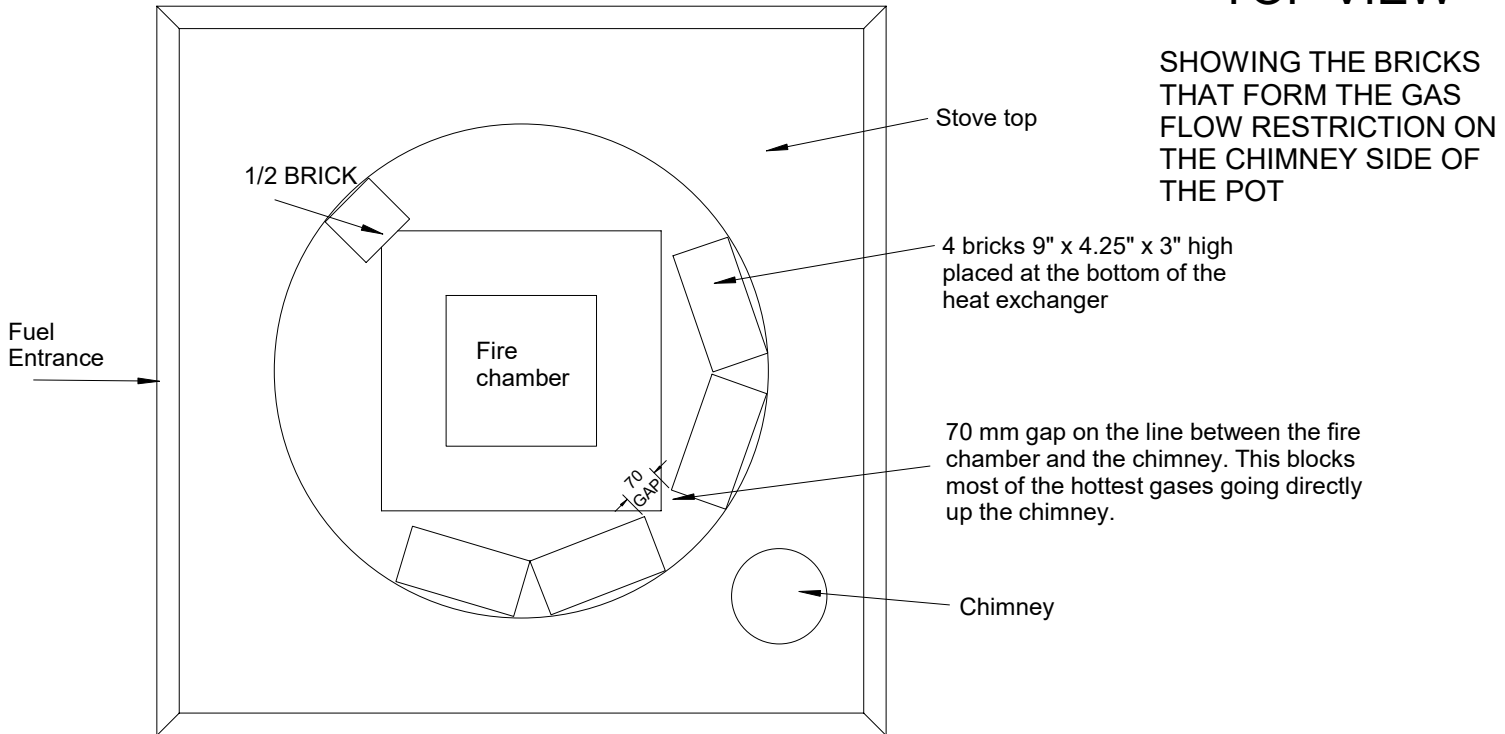

SHOWING THE BRICKS THAT FORM THE GAS FLOW RESTRICTION ON THE CHIMNEY SIDE OF THE POT

Stove top

4 bricks 9" x 4.25" x 3" high placed at the bottom of the heat exchanger

70 mm gap on the line between the fire chamber and the chimney. This blocks most of the hottest gases going directly up the chimney.

Chimney

			2024 MEMD 300 LITRE STOVE
			Key Features:
			Direct exit of the gases to the chimney is partially blocked
			Chimney is in the corner
			Material: Brick and High temperature brick
			Quantity: Various
			Scale: Not to scale
Version: 1.31	Date: 2024-12-02	Initials: CPP	Drawn By: C Pemberton-Pigott
Drawing No. 03 MEMD 300 Litres Top View control bricks			Part Top View of Blocking Bricks